


rtc[®]

COUPLING TECHNOLOGY



NEW DESIGN!
with EUROPEAN Plug Profile



www.rtc-tec.com



URS is a member of Registrar of Standards (Holdings) Ltd.

TYPE 090 **rtc**

EUROPEAN Type - EUROPÄISCHER Typ - AVRUPA Tip

Temperature Range - Temperaturbereich
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck
16 bar (232 PSI)

Flow size - Nennweiten


rtc 090.06 6 mm
rtc 090.09 9 mm
rtc 090.13 13 mm

Standard version - Standardversion

Brass - Messing
FPM (V) PTFE coated - Viton PTFE beschichtet



WATER



rtc TYPE 100



FRENCH Type - FRANZÖSISCHER Typ - FRANSIZ Tip

Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
10 bar (145 PSI)


Flow size - Nennweiten - Akış Çapı

rtc 100.06 6 mm
rtc 100.08 8 mm
rtc 100.12 13 mm

SAFETY Type -
Typ SICHERHEITSVERRIEGLUNG
EMNİYETLİ Tip

Flow size - Nennweiten - Akış Çapı

rtc 100.06-S* 6 mm
rtc 100.08-S* 8 mm
rtc 100.12-S* 13 mm



*New Design - Neues Design - Yeni Tasarım

WATER

TYPE 101 **rtc**


Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
16 bar (232 PSI)

Flow size - Nennweiten - Akış Çapı

rtc 101.06 6 mm
rtc 101.09 9 mm
rtc 101.10* 10 mm
rtc 101.12 12 mm
rtc 101.16 16 mm
rtc 101.20 20 mm
rtc 101.25 25 mm
rtc 101.38 38 mm



*New Design - Neues Design - Yeni Tasarım

PNEUMATIC
WATER

rtc TYPE 099



INTERNATIONAL Type - INTERNATIONAL Typ - ULUSLARARASI Tip

Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
16 bar (232 PSI)

Flow size - Nennweiten - Akış Çapı

rtc 099.06	6 mm
rtc 099.09	9 mm
rtc 099.15	15 mm

Standard version - Standardversion - Standart Versiyon

Brass - Messing - Piringç

Seals FPM (V) - FPM dichtung - FPM Conta



Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)

-10°C +180°C (+14°F +356°F) FPM (V)

Working Pressure - Betriebsdruck - Çalışma Basıncı

Brass/Messing: 50-210 bar (725 - 3045 PSI)

Stainless Steel/Edensthal: 100-300 bar (1450-4350 PSI)

Flow size - Nennweiten - Akış Çapı

rtc 070.04	4 mm
rtc 070.08	8 mm
rtc 070.10	10 mm
rtc 070.13	13 mm
rtc 070.16	16 mm
rtc 070.19	19 mm
rtc 070.32	32 mm
rtc 070.38	38 mm
rtc 070.50	50 mm

ISO 7241-1 SERIE B

TYPE 070 rtc



WATER
PNEUMATIC
HYDRAULIC

rtc TYPE 152



Flat Faced Non-Spill - Flachdichtende Ausführung - Düz Alınlı Damlatmasız

Temperature Range - Temperaturbereich - Sıcaklık Aralığı


-20°C +100°C (-4°F +212°F) Nitril (N)

-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
16-50 bar (232-750 PSI)

Flow size - Nennweiten - Akış Çapı

rtc 152.10	10 mm
rtc 152.12	12 mm
rtc 152.16	16 mm
rtc 152.20	20 mm
rtc 152.25	25 mm
rtc 152.32	32 mm



WATER

TYPE 102 **rtc**

One Hand Connection "PUSH-PULL" Disconnection
Eine Hand Kuppeln "PUSH-PULL" Lösen
Tek El ile Kapağı "ÇEKEREK-İTEREK" Çıkarma


Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
50 bar (725 PSI)

Flow size - Nennweiten - Akış Çapı

rtc 102.06 6 mm
rtc 102.07 7 mm
rtc 102.09 9 mm
rtc 102.12 12 mm
rtc 102.16 16 mm



WATER

rtc TYPE 093



Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
20 bar (290 PSI)

Flow size - Nennweiten - Akış Çapı
rtc 093.08 8 mm



WATER

TYPE 106 **rtc**

Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
10 bar (145 PSI)

Flow size - Nennweiten - Akış Çapı

rtc 106.19 19 mm
rtc 106.25 25 mm
rtc 106.33 33 mm
rtc 106.42* 42 mm
rtc 106.50 50 mm
rtc 106.63* 63 mm
rtc 106.110* 110 mm

NEW DESIGN!
SINGLE & DOUBLE Shut-Off



WATER

*New Design - Neues Design - Yeni Tasarım

rtc TYPE 098




Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
16 - 20 bar (232 - 290 PSI)

Flow size - Nennweiten - Akış Çapı

rtc 098.06	6 mm
rtc 098.08	8 mm
rtc 098.12	12 mm



WATER

TYPE 105 rtc

Leak Tight on Connection & Disconnection

Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)
0°C +250°C (+32°F +482°F) FFKM (W)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
16 bar (232 PSI)

Flow size - Nennweiten - Akış Çapı

rtc 105.09	9 mm
rtc 105.12	12 mm
rtc 105.16	16 mm
rtc 105.20	20 mm
rtc 105.25	25 mm



WATER

rtc TYPE 108



One Hand Connection "PUSH-PULL" Disconnection
Eine Hand Kuppeln "PUSH-PULL" Lösen
Tek El ile Kapağı "ÇEKEREK-İTEREK" Çıkarma


Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
180 bar (2610 PSI)

Flow size - Nennweiten - Akış Çapı

rtc 108.06	6 mm
rtc 108.07	7 mm
rtc 108.09	9 mm
rtc 108.12	12 mm
rtc 108.16	16 mm



WATER
HYDRAULIC

TYPE 103 **rtc**

Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı

rtc 103.07*	550 bar (8000 PSI)
rtc 103.08	450 bar (6525 PSI)
rtc 103.11	450 bar (6525 PSI)
rtc 103.12	400 bar (5800 PSI)
rtc 103.15	400 bar (5800 PSI)
rtc 103.19	400 bar (5800 PSI)

Flow size - Nennweiten - Akış Çapı

rtc 103.07	7 mm
rtc 103.08	8 mm
rtc 103.11	11 mm
rtc 103.12	12 mm
rtc 103.15	15 mm
rtc 103.19	19 mm



Max. Residual Pressure for Connection Under Pressure (150 bar / only 103.07 is 400 bar)

Max. Restruck für die Verbindung unter Druck (150 bar / nur 103.07 ist 400 bar)

Max. Basınç Altında Takma Basıncı (150 bar / sadece 103.07 400 bar)

*New Design - Neues Design - Yeni Tasarım



HYDRAULIC

rtc TYPE 124



Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı

rtc 124.06	450 bar (6525 PSI)
rtc 124.08	450 bar (6525 PSI)
rtc 124.09	350 bar (5075 PSI)
rtc 124.12	350 bar (5075 PSI)
rtc 124.16	350 bar (5075 PSI)

Flow size - Nennweiten - Akış Çapı

rtc 124.06	6 mm
rtc 124.08	8 mm
rtc 124.09	9 mm
rtc 124.12	12 mm
rtc 124.16	16 mm

Max. Residual Pressure for Connection Under Pressure (150 bar)

Max. Restruck für die Verbindung unter Druck (150 bar)

Max. Basınç Altında Takma Basıncı (150 bar)



HYDRAULIC

ISO 6150 - C

TYPE 170 **rtc**

Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı

rtc 170.03	400 bar (5800 PSI)
rtc 170.06	450 bar (6525 PSI)
rtc 170.08	400 bar (5800 PSI)
rtc 170.11	350 bar (5100 PSI)
rtc 170.19	300 bar (4350 PSI)

Flow size - Nennweiten - Akış Çapı

rtc 170.03	3 mm
rtc 170.06	5.5 mm
rtc 170.08	8 mm
rtc 170.11	11 mm
rtc 170.19	19 mm



WATER
PNEUMATIC
HYDRAULIC

rtc TYPE 104



Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)

-10°C +180°C (+14°F +356°F) FPM (V)

Working Pressure - Betriebsdruck - Çalışma Basıncı

16 - 500 bar (230 - 7250 PSI)

Flow size - Nennweiten - Akış Çapı

rtc 104.04	4 mm
rtc 104.06	6 mm
rtc 104.08	8 mm
rtc 104.10	10 mm
rtc 104.12	12 mm
rtc 104.15	15 mm
rtc 104.20	20 mm
rtc 104.25	25 mm
rtc 104.32	32 mm
rtc 104.37	37 mm
rtc 104.50	50 mm
rtc 104.75	75 mm

WATER
PNEUMATIC
HYDRAULIC

TYPE 126 rtc

Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)

-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı

500 bar (7250 PSI)

Flow size - Nennweiten - Akış Çapı


rtc 126.08	8 mm
rtc 126.12	12 mm
rtc 126.20	20 mm
rtc 126.25	25 mm
rtc 126.33	33 mm



HYDRAULIC



rtc TYPE 123



Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)

-10°C +180°C (+14°F +356°F) FPM (V)

-20°C +150°C (-4°F +302°F) EPDM (E)

0°C +250°C (-40°F +482°F) FFKM (W)

-40°C +175°C (-40°F +347°F) FMQ (SN)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı

260 bar (3770 PSI)

Flow size - Nennweiten - Akış Çapı

rtc 123.03	3 mm
rtc 123.05	5 mm
rtc 123.08	8 mm

WATER
PNEUMATIC
HYDRAULIC

Compatible - Kompatibilität - Muadil
Walther LP Type

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Working Pressure - Betriebsdruck - Çalışma Basıncı
30 - 100 bar (435 - 1450 PSI)

Flow size - Nennweiten - Akış Çapı

rtc 200.04	4 mm
rtc 200.06	6 mm
rtc 200.07	7 mm
rtc 200.09	9 mm
rtc 200.12	12 mm
rtc 200.19	19 mm
rtc 200.32	32 mm
rtc 200.50	50 mm

WATER
PNEUMATIC
HYDRAULIC

TYPE 200 **rtc**



rtc TYPE 201



Compatible - Kompatibilität - Muadil
Walther MD Type

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Working Pressure - Betriebsdruck - Çalışma Basıncı
100 - 250 bar (1450 - 3625 PSI)

Flow size - Nennweiten - Akış Çapı

rtc 201.06	6 mm
rtc 201.07	7 mm
rtc 201.12	12 mm
rtc 201.19	19 mm
rtc 201.25	25 mm
rtc 201.32	32 mm
rtc 201.50	50 mm



HYDRAULIC

Compatible - Kompatibilität - Muadil
Walther HP Type

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)


Working Pressure - Betriebsdruck - Çalışma Basıncı
200 - 2000 bar (2900 - 29000 PSI)

Flow size - Nennweiten - Akış Çapı

rtc 202.04	4 mm
rtc 202.06	6 mm
rtc 202.10	10 mm
rtc 202.16	16 mm
rtc 202.20	20 mm
rtc 202.32	32 mm
rtc 202.50	50 mm

HYDRAULIC

TYPE 202 **rtc**



rtc TYPE 203

High Temperature




Compatible - Kompatibilität - Muadil
Walther TE Type

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +270°C (-4°F +518°F) PTFE (T)

Working Pressure - Betriebsdruck - Çalışma Basıncı
30 - 100 bar (435 - 1450 PSI)

Flow size - Nennweiten - Akış Çapı

rtc 203.09	9 mm
rtc 203.12	12 mm
rtc 203.19	19 mm
rtc 203.32	32 mm
rtc 203.50	50 mm



Compatible - Kompatibilität - Muadil
Walther UF Type

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Working Pressure - Betriebsdruck - Çalışma Basıncı
40 - 30 bar (580 - 435) for liquids
30 - 10 bar (435 - 145) for gases

Flow size - Nennweiten - Akış Çapı

rtc 204.06	6 mm
rtc 204.07	7 mm
rtc 204.12	12 mm
rtc 204.19	19 mm
rtc 204.32	32 mm


Available Codes - Verfügbaren Codes



WATER
PNEUMATIC
HYDRAULIC

Coded Un-Interchangeable serie

TYPE 204 rtc



rtc TYPE 205



Compatible - Kompatibilität - Muadil
Walther CT Type

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-10°C +180°C (+14°F +356°F) FPM (V)
-20°C +150°C (-4°F +302°F) EPDM (E)
0°C +250°C (-40°F +482°F) FFKM (W)

Working Pressure - Betriebsdruck - Çalışma Basıncı
40 - 65 bar (580 - 930)

Flow size - Nennweiten - Akış Çapı

rtc 205.05	5 mm
rtc 205.07	7 mm
rtc 205.09	9 mm
rtc 205.12	12 mm
rtc 205.19	19 mm



HYDRAULIC

Ultimate High Pressure (UHP)

TYPE 080 **rtc**

Compatible - Kompatibilität - Muadil
Cejn 115

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
1,000 Bar (100 MPa - 14,503PSI)

Flow size - Nennweite
rtc type 080.04 4.0 mm

Technical Specifications & Advantages

- Ultimate High Pressure (UHP) dripless hydraulic coupling.
- Plug and Coupler has plastic dust cap in order to increase the service life.
- Dripless connection and disconnection
- Aluminium Dust cap is also available.
- Uninterchangeable sister coupling is also available in order to avoid any mis-connection. (rtc 082.04)

Dripless Hydraulic Coupling For
Ultimate High Pressure



HYDRAULIC

rtc TYPE 081

Ultimate High Pressure (UHP)

Compatible - Kompatibilität - Muadil
Cejn 116

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)


Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
1,500 Bar (150 MPa - 21,755PSI)

Flow size - Nennweite
rtc type 081.04 4.0 mm

Technical Specifications & Advantages

- Ultimate High Pressure (UHP) dripless hydraulic coupling.
- Plug and Coupler has plastic dust cap in order to increase the service life.
- Dripless connection and disconnection
- Aluminium Dust cap is also available.

Dripless Hydraulic Coupling For
Ultimate High Pressure



HYDRAULIC

Ultimate High Pressure (UHP)

TYPE 083 **rtc**

Compatible - Kompatibilität - Muadil
Cejn 125

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)


Working Pressure - Betriebsdruck
2,000 Bar (200 MPa - 29,000 PSI)

Flow size - Nennweite
rtc type 083.04 4.0 mm

Technical Specifications & Advantages

- Ultimate High Pressure (UHP) dripless hydraulic coupling.
- Plug and Coupler has plastic dust cap in order to increase the service life.
- Dripless connection and disconnection
- Aluminium Dust cap is also available.

Dripless Hydraulic Coupling For
Ultimate High Pressure



HYDRAULIC

rtc TYPE 072

ISO 16028



Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)

-10°C +180°C (+14°F +356°F) FPM (V)

Working Pressure - Betriebsdruck - Çalışma Basıncı

270 - 325 bar (3925 - 4725 PSI)


Flow size - Nennweiten - Akış Çapı

rtc 072.06 6 mm

rtc 072.10 10 mm

rtc 072.12 12 mm

rtc 072.16 16 mm



Double Shut-off

HYDRAULIC

High Temperature

TYPE 219 rtc

Compatible - Kompatibilität - Muadil

Walther 11 Type

Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +325°C (-4°F +617°F) FFKM (W)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı

20 bar (290 PSI)


Flow size - Nennweiten - Akış Çapı

rtc 219.12 12 mm

rtc 219.19 19 mm

Using Area

For Hot Oil Usages - Für heiße Öl Anwendungen - Kızgın Yağ Kullanımı için



Double Shut-off



Full flow

HYDRAULIC

rtc TYPE 127



Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)

-10°C +180°C (+14°F +356°F) FPM (V)


-50°C +150°C (-58°F +302°F) EPDM (E)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı

10 bar (145 PSI)

Flow size - Nennweiten - Akış Çapı

rtc 127.37 37 mm



Double Shut-off

WATER
HYDRAULIC

Self Venting Safety Type

Sicherheitskupplung mit Vorentlüftungsfunktion

Hava Tahliyesi Emniyetli Tip

- The system perfectly fits to the **ISO 4414**, **EN 983** safety standards.
- Full flow, negligible loss of pressure
- Simple operation, no force required
- Compact design

Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)

-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı

25 bar (365 PSI)

15 bar (220 PSI) Connection / Disconnection

Flow size - Nennweiten - Akış Çapı

3 mm	rtc 461
5.5 mm	rtc 460 / 461 / 462 / 466 / 467
8 mm	rtc 460 / 461 / 463 / 464 / 465 / 468 / 469
11 mm	rtc 460 / 461
19 mm	rtc 461

Connection - Anschluss - Bağlantı

1/8
1/4
3/8
1/2
3/4



TYPE 460-468

rtc

PNEUMATIC



rtc TYPE 450

Sleeve Twist Coupler



Self Venting Safety Type

Sicherheitskupplung mit Vorentlüftungsfunktion

Hava Tahliyesi Emniyetli Tip

- The system perfectly fits to the **ISO 4414**, **EN 983** safety standards.
- Model to ISO 6150-C-10 and AFNOR: C-10 NF E 49-053
- Safety feature: 2-stage disconnection

Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)

-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı

25 bar (365 PSI)

15 bar (220 PSI) Connection/Disconnection

Flow size - Nennweiten - Akış Çapı

rtc 450.03	3 mm
rtc 450.06	5.5 mm
rtc 450.08	8 mm
rtc 450.11	11 mm

Connection - Anschluss - Bağlantı

1/8
1/4
3/8
1/2



PNEUMATIC

Self Venting Safety Type

Sicherheitskupplung mit Vorentlüftungsfunktion

Hava Tahliyesi Emniyetli Tip

- The system perfectly fits to the **ISO 4414**, **EN 983** safety standards.
- Model to ISO 6150-C-10 and AFNOR: C-10 NF E 49-053
- Safety feature: 2-stage disconnection

Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)

-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı

25 bar (365 PSI)

15 bar (220 PSI) Connection/Disconnection

Flow size - Nennweiten - Akış Çapı

rtc 451.06	5.5 mm
rtc 451.08	8 mm
rtc 451.11	11 mm

Connection - Anschluss - Bağlantı

1/4
3/8
1/2



TYPE 451

rtc

PNEUMATIC



rtc TYPE 452

Sleeve Twist Coupler



Self Venting Safety Type
Sicherheitskupplung mit Vorentlüftungsfunktion
Hava Tahliyeli Emniyetli Tip

- The system perfectly fits to the **ISO 4414**, **EN 983** safety standards.
- Model to ISO 6150-C-10 and AFNOR: C-10 NF E 49-053
- Safety feature: 2-stage disconnection
- Coded type (Non-Interchangeable)

Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı

25 bar (365 PSI)
15 bar (220 PSI) Connection/Disconnection

Flow size - Nennweiten - Akış Çapı
rtc 452.06 5.5 mm

Connection - Anschluss - Bağlantı
1/4



PNEUMATIC

Self Venting Type
Sicherheits - Schnellkupplung
Hava Tahliyeli Tip

- The system perfectly fits to the **ISO 4414**, **EN 983** safety standards.
- Safety feature: 2-stage disconnection
- Coded type (Non-Interchangeable) is also available.

Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)
-20°C +150°C (-4°F +302°F) EPDM (E)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı

25 bar (365 PSI)

Flow size - Nennweiten - Akış Çapı


rtc 453.11 11 mm
rtc 453.19 19 mm

Connection - Anschluss - Bağlantı

1/2
3/4

Heavy Duty Coupler

TYPE 453 **rtc**



WATER
PNEUMATIC

rtc TYPE 171



Self Venting Safety Type
Sicherheitskupplung mit Vorentlüftungsfunktion
Hava Tahliyeli Emniyetli Tip

- The system perfectly fits to the **ISO 4414**, **EN 983** safety standards requirements.

Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı

rtc 171.06 12 bar (175 PSI)
rtc 171.08 16 bar (230 PSI)
rtc 171.11 16 bar (230 PSI)

Flow size - Nennweiten - Akış Çapı

rtc 171.06 6 mm
rtc 171.08 8 mm
rtc 171.11 11 mm



PNEUMATIC

TYPE 002 **rtc**

Compatible - Kompatibilität - Muadil

rtc 463.08
rtc 025
rtc 026
Rectus 25 & 26
Cejn 320

Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı

35 bar (510 PSI)

Flow size - Nennweiten - Akış Çapı

rtc type 002 7.2 mm



PNEUMATIC



rtc TYPE 013



Compatible - Kompatibilität - Muadil

Nitto Kohki Hi Cupla & Hi Cupla 200
Rectus 13
Cejn 315

Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı

35 bar (510 PSI)

Flow size - Nennweiten - Akış Çapı

rtc type 013 7.5 mm



PNEUMATIC

TYPE 020 **rtc**

Compatible - Kompatibilität - Muadil

For Full-Flow and Single Shut-off

Rectus 20
Walther 06-003

For Double Shut-off

Rectus 20KB
Walther 06-003

Temperature Range - Temperaturbereich - Sıcaklık Aralığı


-20°C +100°C (-4°F +212°F) Nitril (N)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı

35 bar (510 PSI)

Flow size - Nennweiten - Akış Çapı

rtc type 020 2.7 mm



WATER
PNEUMATIC

rtc TYPE 021



Compatible - Kompatibilität - Muadil
For Full-Flow and Single Shut-off
Rectus 21
Camozzi

For Double Shut-off
Rectus 21KB

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)

Max.Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
35 bar (510 PSI)

Flow size - Nennweiten - Akış Çapı
rtc type 021 5 mm



Single Shut-off Full flow

TYPE 022 rtc



Compatible - Kompatibilität - Muadil

rtc 462.06
rtc 014
AMFLO C38
ARO 210
Cejn 300
Foster 210
Parker B53
Rectus 14 & 22

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)

Max.Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
35 bar (510 PSI)

Flow size - Nennweiten - Akış Çapı
rtc type 022 5.5 mm



Single Shut-off Full flow

PNEUMATIC

rtc TYPE 023



Compatible - Kompatibilität - Muadil
US (Industrial) MIL-C-4109 1/4
ISO 6150-B-12

rtc 460.06
Hansen 1000
Cejn 310
Foster 3003
Parker B23
Rectus 23 & 24

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)

Max.Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
35 bar (510 PSI)

Flow size - Nennweiten - Akış Çapı
rtc type 023 5.5 mm



Single Shut-off Full flow

PNEUMATIC

TYPE 025 **rtc**

Compatible - Kompatibilität - Muadil
For Full-Flow and Single Shut-off

rtc 463.08
rtc 026
Rectus 25 & 26
Cejn 320


For Double Shut-off

Rectus 25KB & 26KB

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
35 bar (510 PSI)

Flow size - Nennweiten - Akış Çapı
rtc type 025 7.8 mm



PNEUMATIC

rtc TYPE 026



Compatible - Kompatibilität - Muadil
For Full-Flow and Single Shut-off

rtc 463.08
rtc 025
Rectus 25 & 26
Cejn 320


For Double Shut-off

Rectus 25KB & 26KB

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
35 bar (510 PSI)

Flow size - Nennweiten - Akış Çapı
rtc type 026 7.2 mm



PNEUMATIC

TYPE 027 **rtc**

Compatible - Kompatibilität - Muadil
For Full-Flow and Single Shut-off


Rectus 27
Cejn 410
Tema 1700

For Double Shut-off
Rectus 27KB

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
35 bar (510 PSI)

Flow size - Nennweiten - Akış Çapı
rtc type 027 10 mm



PNEUMATIC

rtc TYPE 033



Compatible - Kompatibilität - Muadil

rtc 468.08
Atlas Copco QIC10
Rectus 33

Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı

35 bar (510 PSI)

Flow size - Nennweiten - Akış Çapı

rtc type 033 8.5 mm



PNEUMATIC

TYPE 038 rtc



Compatible - Kompatibilität - Muadil

rtc 038.15	rtc 038.19
Rectus 38 - 38KB	Rectus 39 - 39KB
Hansen 6000	Hansen 7000

Temperature Range - Temperaturbereich - Sıcaklık Aralığı


-20°C +100°C (-4°F +212°F) Nitril (N)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı

35 bar (510 PSI)

Flow size - Nennweiten - Akış Çapı

rtc type 038.15	15 mm
rtc type 038.19	19 mm



WATER
PNEUMATIC

rtc TYPE 042



Compatible - Kompatibilität - Muadil

Parker 42

Temperature Range - Temperaturbereich - Sıcaklık Aralığı

-20°C +100°C (-4°F +212°F) Nitril (N)

-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı

16 bar (230 PSI)

Flow size - Nennweiten - Akış Çapı

rtc type 042.12 12 mm



WATER

TYPE 043 **rtc**

Compatible - Kompatibilität - Muadil
Legris 8500L

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
15 bar (215 PSI) - For brass

Flow size - Nennweiten - Akış Çapı
rtc type 043.12 12 mm
rtc type 043.19 19 mm



WATER



rtc TYPE 044



Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
15 bar (215 PSI) - For brass

Flow size - Nennweiten - Akış Çapı
rtc type 044.11 11 mm
rtc type 044.16 16 mm
rtc type 044.19 19 mm



WATER

Compatible - Kompatibilität - Muadil
Parker ST
Hansen ST

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)
-50°C +150°C (-58°F +302°F) EPDM (E)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
70 - 310 bar (510 PSI) - For brass
140 - 350 bar - (2025 - 5075 PSI) For Steel
100 - 450 bar - (1450 - 6525 PSI) For Stainless-steel

Flow size - Nennweiten - Akış Çapı
rtc type 045.04 4 mm
rtc type 045.06 6.5 mm
rtc type 045.10 9.5 mm
rtc type 045.13 12.7 mm
rtc type 045.19 19 mm
rtc type 045.25 25 mm
rtc type 045.33 33 mm
rtc type 045.37 37 mm

TYPE 045 **rtc**



WATER
PNEUMATIC
HYDRAULIC

rtc TYPE 046



Compatible - Kompatibilität - Muadil
Snap Tite H

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
155 - 450 bar (400 - 2250 PSI) - Brass
100 - 450 bar (1500 - 6500 PSI) - Steel
35 - 350 bar (500 - 5000 PSI) - Stainless Steel
20 - 155 bar (300 - 2250 PSI) - Aluminium

Flow size - Nennweiten - Akış Çapı

rtc type 046.06	6 mm
rtc type 046.09	9 mm
rtc type 046.13	13 mm
rtc type 046.19	19 mm
rtc type 046.25	25 mm
rtc type 046.30	30 mm
rtc type 046.38	38 mm
rtc type 046.50	50 mm



Compatible - Kompatibilität - Muadil
Nitto Kohki TSP

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma Basıncı
30 - 50 bar (435 - 725 PSI) - For brass
45 - 100 bar (650 - 1.450 PSI) - Stainless Steel

Flow size - Nennweiten - Akış Çapı

rtc type 053.06	6 mm
rtc type 053.10	10 mm
rtc type 053.13	13 mm
rtc type 053.19	19 mm
rtc type 053.25	25 mm



rtc TYPE MMN & MFN & EBFM

Male - Female Thread Adapter
Aussen - Innengewinde Adapter
Erkek - Dişi Dişli Adaptörü

Material: Ms58 Brass
Messing - Piring



MFN 13-10	BSP 1/4	BSP 1/8
MFN 17-13	BSP 3/8	BSP 1/4
MFN 21-17	BSP 1/2	BSP 3/8
MFN 26-21	BSP 3/4	BSP 1/2

MFN 1415-1010	M14x1.5	M10x1
MFN 1815-1415	M18x1.5	M14x1.5
MFN 2415-1615	M24x1.5	M16x1.5

(DIN 3863) Male Thread Adapter with Inner Cone
Aussengewinde Doppelnippel mit Innenkonus
Erkek Dişli Adaptörü İç Konik

Material: Ms58 Brass
Messing - Piring



MMN10-10	BSP 1/8	BSP 1/8
MMN13-13	BSP 1/4	BSP 1/4
MMN 17-17	BSP 3/8	BSP 3/8
MMN 21-21	BSP 1/2	BSP 1/2
MMN 26-26	BSP 3/4	BSP 3/4
MMN 13-1415	BSP 1/4	M14x1.5
MMN 17-1615	BSP 3/8	M16x1.5
MMN 21-1815	BSP 1/2	M18x1.5
MMN 26-2415	BSP 3/4	M24x1.5
MMN 1415-1415	M14x1.5	M14x1.5
MMN 1615-1615	M16x1.5	M16x1.5

45° & 90° Male to Female Elbow
Innen - Aussengewinde Winkel
İç - Dişi Dişli Dirsek

Material: Ms58 Brass - Messing - Piring

EBFM 10 - 90	BSP 1/8
EBFM 13 - 90	BSP 1/4
EBFM 17 - 90	BSP 3/8
EBFM 21 - 90	BSP 1/2
EBFM 26 - 90	BSP 3/4
EBFM 33 - 90	BSP 1



EBFM 10 - 45	BSP 1/8
EBFM 13 - 45	BSP 1/4
EBFM 17 - 45	BSP 3/8
EBFM 21 - 45	BSP 1/2
EBFM 26 - 45	BSP 3/4
EBFM 33 - 45	BSP 1



ACCESSORIES

TYPE BC & BCO **rtc**

Pressure Plug with Copper Washer
Verschlussstopfen mit Kupferscheibe
Bakır Pullu Kör Tıpa

PPD 10 BSP 1/8
PPD 13 BSP 1/4
PPD 17 BSP 3/8
PPD 21 BSP 1/2
PPD 26 BSP 3/4
PPD 33 BSP 1
PPD 1010 M 10x1
PPD 1215 M 12x1.5
PPD 1415 M 14x1.5
PPD 1615 M 16x1.5
PPD 2215 M 22x1.5
PPD 2415 M 24x1.5



Threadless Pressure Plug
Verschlussstopfen ohne Gewinde
Dişsiz Kör Tıpa

Compatible - Austauschbar - Muadil
Hasco Z 942

1. Material: Ms58 Brass - Messing
2. Material: Inner Part Stainless Steel - Edelstahl

BC - 06
BC - 08
BC - 10
BC - 12
BC - 15
BC - 16
BC - 20



Threadless Pressure Plug with O-Ring
Verschlussstopfen mit O-Ring
O-Ringli Kör Tıpa

Compatible - Austauschbar - Muadil
EOC KN / 105

Material: Ms58 Brass - Messing
O-Ring: Viton
Max. Temp: 200°C

BCO - 06
BCO - 07
BCO - 08
BCO - 8.5
BCO - 10
BCO - 11.5
BCO - 12
BCO - 14
BCO - 15



BCO - 16
BCO - 20
BCO - 22
BCO - 25


ACCESSORIES **rtc**

rtc TYPE NOP & PPG & PPR

NOP 10/06 BSP 1/8 4x6 mm
NOP 10/08 BSP 1/8 6x8 mm
NOP 10/10 BSP 1/8 8x10 mm
NOP 13/06 BSP 1/4 4x6 mm
NOP 13/08 BSP 1/4 6x8 mm
NOP 13/10 BSP 1/4 8x10 mm
NOP 13/12 BSP 1/4 9x12 mm
NOP 17/06 BSP 3/8 4x6 mm
NOP 17/08 BSP 3/8 6x8 mm
NOP 17/10 BSP 3/8 8x10 mm
NOP 17/12 BSP 3/8 9x12 mm
NOP 21/08 BSP 1/2 6x8 mm
NOP 21/10 BSP 1/2 8x10 mm
NOP 21/12 BSP 1/2 9x12 mm




Material: Ms58 Brass - Messing
Plate: Nickel Plated - Verzinkt



Material: Ms58 Brass - Messing


PPG 10 BSP 1/8
PPG 13 BSP 1/4
PPG 17 BSP 3/8
PPG 21 BSP 1/2
PPM 0875 M8x075
PPM 1010 M10x1
PPM 1215 M12x1.5
PPM 1415 M14x1.5
PPM 1615 M16x1.5
PPM 2015 M20x1.5




Material: Ms58 Brass - Messing

PPR 10 BSPT 1/8
PPR 13 BSPT 1/4
PPR 17 BSPT 3/8
PPR 21 BSPT 1/2
PPK 0875 M8x075
PPK 1010 M10x1
PPK 1215 M12x1.5
PPK 1415 M14x1.5
PPK 1615 M16x1.5
PPK 2015 M20x1.5

ACCESSORIES **rtc**

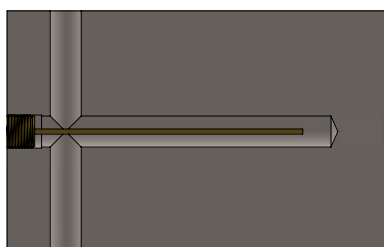

Straight Baffle (SBM)

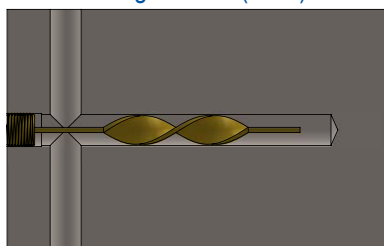

Turbo Baffle (TBM)

Baffles

TYPE SBM & TBM **rtc**



ACCESSORIES **rtc**

rtc TYPE SRM & SRG

SRM 08 x 38	M 8x1.25
SRM 08 x 60	M 8x1.25
SRM 08 x 80	M 8x1.25
SRM 08 x 100	M 8x1.25
SRM 10 x 38	M 10x1.5
SRM 10 x 60	M 10x1.5
SRM 10 x 80	M 10x1.5
SRM 10 x 100	M 10x1.5
SRM 10 x 120	M 10x1.5
SRM 10 x 150	M 10x1.5
SRM 12 x 38	M 12x1.75
SRM 12 x 60	M 12x1.75
SRM 12 x 80	M 12x1.75
SRM 12 x 100	M 12x1.75
SRM 12 x 120	M 12x1.75
SRM 12 x 150	M 12x1.75
SRM 14 x 38	M 14x2.0

Extension Hose Plugs - Verlängerungsrippel - Uzatma Hortum Uç
Material: Ms58 Brass - Messing - Piring



SRG 10 x 38	BSP 1/8
SRG 10 x 60	BSP 1/8
SRG 10 x 80	BSP 1/8
SRG 10 x 100	BSP 1/8
SRG 10 x 120	BSP 1/8
SRG 10 x 150	BSP 1/8
SRG 13 x 38	BSP 1/4
SRG 13 x 60	BSP 1/4
SRG 13 x 80	BSP 1/4
SRG 13 x 100	BSP 1/4
SRG 13 x 120	BSP 1/4
SRG 13 x 150	BSP 1/4

ACCESSORIES



Ear Hose Clamp - Ohr-Schlauchschellen
Kulaklı Hortum Kelepçesi
Material: W1 - DIN 1.0330 Mild Steel

CPE - 0709
CPE - 0911
CPE - 1315
CPE - 1417
CPE - 1518
CPE - 1720
CPE - 1821
CPE - 2023



Hose Clamp - Schlauchschellen - Hortum Kelepçesi
Material: Screw - DIN 1132 Zinc Plated Steel
Housing - AISI 430 (DIN 1.4016 Stainless Steel)
Band - AISI 430 (DIN 1.4016 Stainless Steel)

CPW2 - 0812 - 09
CPW2 - 1016 - 09
CPW2 - 1220 - 09
CPW2 - 1627 - 09
CPW2 - 2032 - 09
CPW2 - 2540 - 09

ACCESSORIES

rtc TYPE 092

Knock-out Coupler / Ejector Coupler



Pneumatic Series

Advantages

- Quick and easy installation
- Return of the ejector plate is assured
- Part ejection is assured
- Coupling is obtained in any position, disconnecting is made only after the ejector plate is fully returned.
- Fast acting, up to 30 stokes per minute.
- Can be used on all injection machines equipped with hydraulic or mechanical ejection
- Set-up time can be greatly reduced.
- Reduced noise on machines with mechanical knockouts
- Especially suited for injection machines that do not have easy access to the ejector plate.

Compatible - Kompatibilität - Muadil

Max.Pull Force - Max.Zugkraft - Max. Çekme Kuvveti

rtc 092.16	1500 kg	Alba 300 Series
rtc 092.18	2400 kg	Alba 400 Series
rtc 092.19	1500 kg	Pneumatic Series
rtc 092.25	3200 kg	Alba 500 Series
rtc 092.36	6000 kg	Pneumatic Series

Vorteile

- Schnelle und einfache Installation
- Die Rückkehr der Auswurfplatte ist gewährleistet
- Teil Ausstoß ist gewährleistet
- Die Kupplung wirkt in jeder Position - Trennung erfolgt erst wenn die Auswurfplatte voll zurück gefahren ist
- Schnelle Funktionalität - bis zu 30 Hübe pro Minute
- Kann auf alle Spritzgussmaschinen ausgestattet werden mit hydraulischen oder mechanischen Auswurf
- Rüstzeit kann erheblich verkürzt werden
- Speziell für Spritzgussmaschinen mit schwer zugänglicher Auswurfplatte


ACCESSORIES

TYPE MHN & FHN & HHN **rtc**

Male and Female Hose Nipples with 8 Different Hose-Connection Types

8 Schlauchanschlusstypen mit Innen- und Aussengewinde

8 Farklı hortum bağlantı profilli Erkek ve Dişi Vidalı uçlar

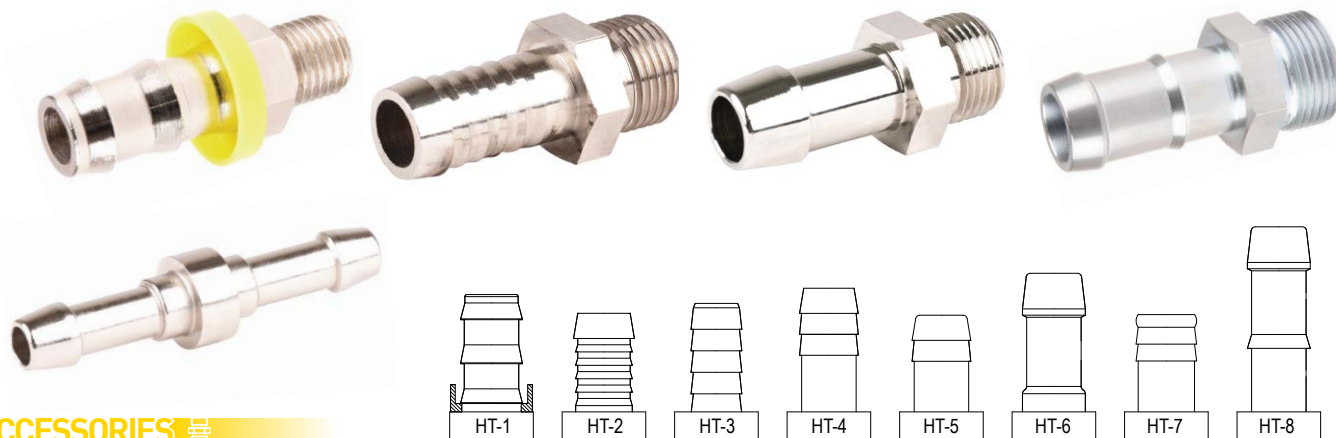

ACCESSORIES **rtc**

rtc TYPE SPN

Swivel Hose Nippel



Material: Steel - Stahl
Plate: Zinc

SPN 1215-06	M12x1.5	1/4 - 6.3
SPN 1415-06	M14x1.5	1/4 - 6.3
SPN 1615-10	M16x1.5	3/8 - 9.5
SPN 1815-10	M18x1.5	3/8 - 9.5
SPN 2215-13	M22x1.5	1/2 - 12.7
SPN 2615-16	M26x1.5	5/8 - 15.9
SPN 3020-19	M30x2.0	3/4 - 19.1
SPN 3620-25	M36x2.0	1 - 25.4



Material: Steel - Stahl
Plate: Zinc

SPN 1215-06-45	M12x1.5	1/4 - 6.3
SPN 1415-06-45	M14x1.5	1/4 - 6.3
SPN 1615-10-45	M16x1.5	3/8 - 9.5
SPN 1815-10-45	M18x1.5	3/8 - 9.5
SPN 2215-13-45	M22x1.5	1/2 - 12.7
SPN 2615-16-45	M26x1.5	5/8 - 15.9
SPN 3020-19-45	M30x2.0	3/4 - 19.1
SPN 3620-25-45	M36x2.0	1 - 25.4



Material: Steel - Stahl
Plate: Zinc

SPN 1215-06-90	M12x1.5	1/4 - 6.3
SPN 1415-06-90	M14x1.5	1/4 - 6.3
SPN 1615-10-90	M16x1.5	3/8 - 9.5
SPN 1815-10-90	M18x1.5	3/8 - 9.5
SPN 2215-13-90	M22x1.5	1/2 - 12.7
SPN 2615-16-90	M26x1.5	5/8 - 15.9
SPN 3020-19-90	M30x2.0	3/4 - 19.1
SPN 3620-25-90	M36x2.0	1 - 25.4

ACCESSORIES **rtc**


TYPE 117 & 118 **rtc**



rtc type 117
Brass Collector
Messing Verteiler
Pirinç Kollektör

Inlet / Einlass
3/4"
1"
1-1/4"

Outlet / Auslass
1/4" & 3/8"
1/4" & 3/8" & 1/2"
3/8" & 1/2" & 3/4"

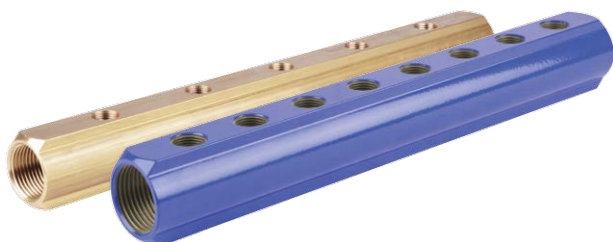

rtc type 118
5 Surfaced Aluminium Collector
5 Seitiger Aluminium Verteiler
5 Yüzlü Alüminyum Kollektör

Inlet / Einlass
3/4"
1"
1-1/4"
1-1/2"
2"

Outlet / Auslauf
1/4" & 3/8"
1/4" & 3/8"
1/4" & 3/8" & 1/2"
3/8" & 1/2"
3/8" & 1/2" & 3/4"

rtc TYPE Ball Valves Male - Female



T Handle Ball Valve

Order No / Bestellnr.		Connection Anschluss
Red / Rot	Blue/ Blau	
TVFM 13-R	TVFM 13-B	BSP 1/4
TVFM 17-R	TVFM 17-B	BSP 3/8
TVFM 21-R	TVFM 21-B	BSP 1/2
TVFM 26-R	TVFM 26-B	BSP 3/4
TVFM 33-R	TVFM 33-B	BSP 1
TVFM 42-R	TVFM 42-B	BSP 1-1/4



Standard Ball Valve

Order No / Bestellnr.		Connection Anschluss
Red / Rot	Blue/ Blau	
SVFM 13-R	SVFM 13-B	BSP 1/4
SVFM 17-R	SVFM 17-B	BSP 3/8
SVFM 21-R	SVFM 21-B	BSP 1/2
SVFM 26-R	SVFM 26-B	BSP 3/4
SVFM 33-R	SVFM 33-B	BSP 1
SVFM 42-R	SVFM 42-B	BSP 1-1/4
SVFM 48-R	SVFM 48-B	BSP 1-1/2



Mini Ball Valve

Order No / Bestellnr.		Connection Anschluss
Red / Rot	Blue/ Blau	
KVFM 13-R	KVFM 13-B	BSP 1/4
KVFM 17-R	KVFM 17-B	BSP 3/8
KVFM 21-R	KVFM 21-B	BSP 1/2
KVFM 26-R	KVFM 26-B	BSP 3/4

ACCESSORIES

TYPE Ball Valves Female - Female



T Handle Ball Valve

Order No / Bestellnr.		Connection Anschluss
Red / Rot	Blue/ Blau	
TVFF 13-R	TVFF 13-B	BSP 1/4
TVFF 17-R	TVFF 17-B	BSP 3/8
TVFF 21-R	TVFF 21-B	BSP 1/2
TVFF 26-R	TVFF 26-B	BSP 3/4
TVFF 33-R	TVFF 33-B	BSP 1
TVFF 42-R	TVFF 42-B	BSP 1-1/4



Standard Ball Valve

Order No / Bestellnr.		Connection Anschluss
Red / Rot	Blue/ Blau	
SVFF 13-R	SVFF 13-B	BSP 1/4
SVFF 17-R	SVFF 17-B	BSP 3/8
SVFF 21-R	SVFF 21-B	BSP 1/2
SVFF 26-R	SVFF 26-B	BSP 3/4
SVFF 33-R	SVFF 33-B	BSP 1
SVFF 42-R	SVFF 42-B	BSP 1-1/4
SVFF 48-R	SVFF 48-B	BSP 1-1/2



Mini Ball Valve

Order No / Bestellnr.		Connection Anschluss
Red / Rot	Blue/ Blau	
KVFF 13-R	KVFF 13-B	BSP 1/4
KVFF 17-R	KVFF 17-B	BSP 3/8
KVFF 21-R	KVFF 21-B	BSP 1/2
KVFF 26-R	KVFF 26-B	BSP 3/4

ACCESSORIES

rtc TYPE 119



rtc type 119

3 Surfaed Stainless Steel Collector
3 Seitiger Edelstahl Verteiler
3 Yüzlü Paslanmaz Çelik Kollektör

Inlet / Einlass

1"
1-1/4"
1-1/2"

Outlet / Auslauf

1/4" & 3/8" & 1/2"
1/4" & 3/8" & 1/2"
1/4" & 3/8" & 1/2"

Options

Low port thread is shown on the picture.

- High port thread,
- Twin profile, (max. 2 Surfaed hole is available)
- Divided profile are available.

TYPE M090 **rtc**

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma basıncı
16 bar (232 PSI)

Flow size - Nennweiten - Akış Çapı
rtc M090.06* 6 mm
rtc M090.09* 9 mm

Connections - Anschlüsse - Bağlantı
6 / 8 / 10 / 12 / 16 / 20 / 24

Circuits - Kreislauf - Giriş/Çıkış

3 ↔ 3 4 ↔ 4 5 ↔ 5 6 ↔ 6 8 ↔ 8 10 ↔ 10 12 ↔ 12

NEW DESIGN!
with EUROPEAN Plug Profile



WATER
PNEUMATIC

*New Design - Neues Design - Yeni Tasarım



rtc TYPE M099

NEW DESIGN!
with INTERNATIONAL Plug Profile



Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma basıncı
16 bar (232 PSI)

Flow size - Nennweiten - Akış Çapı
rtc M099.06* 6 mm
rtc M099.09* 9 mm

Connections - Anschlüsse - Bağlantı
6 / 8 / 10 / 12 / 16 / 20 / 24

Circuits - Kreislauf - Giriş/Çıkış

3 ↔ 3 4 ↔ 4 5 ↔ 5 6 ↔ 6 8 ↔ 8 10 ↔ 10 12 ↔ 12



*New Design - Neues Design - Yeni Tasarım

WATER

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma basıncı
16 bar (232 PSI)

Flow size - Nennweiten - Akış Çapı
rtc M101.06 6 mm
rtc M101.09 9 mm
rtc M101.10* 10 mm
rtc M101.12 12 mm
rtc M101.16 16 mm

Connections - Anschlüsse - Bağlantı
6 / 8 / 10 / 12 / 16 / 20 / 24

Circuits - Kreislauf - Giriş/Çıkış


3 ↔ 3 4 ↔ 4 5 ↔ 5 6 ↔ 6 8 ↔ 8 10 ↔ 10 12 ↔ 12

TYPE M101 **rtc**



WATER
PNEUMATIC

*New Design - Neues Design - Yeni Tasarım



rtc TYPE M150



Flat Faced Non-Spill Multi-Couplings
Flachdichtende Multikupplung in Lecksgefreier Ausführung
Düz Alınlı Damlatmasız Manifold


Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma basıncı
16 bar (232 PSI)

Flow size - Nennweiten - Akış Çapı
rtc M150.09 9 mm
rtc M150.12 12 mm

Connections - Anschlüsse - Bağlantı
6 / 12 / 18

Circuits - Kreislauf - Giriş/Çıkış
3 ↔ 3 6 ↔ 6 9 ↔ 9



Flat Faced Non-Spill Multi-Couplings
Flachdichtende Multikupplung in Lecksgefreier Ausführung
Düz Alınlı Damlatmasız Manifold

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma basıncı
16 bar (232 PSI)

Flow size - Nennweiten - Akış Çapı
rtc M152.10 10 mm
rtc M152.12 12 mm
rtc M152.16 16 mm

Connections - Anschlüsse - Bağlantı
6 / 8 / 10 / 12 / 16 / 20 / 24

Circuits - Kreislauf - Giriş/Çıkış
3 ↔ 3 4 ↔ 4 5 ↔ 5 6 ↔ 6 8 ↔ 8 10 ↔ 10 12 ↔ 12


WATER

*New Design - Neues Design - Yeni Tasarım

TYPE M152 rtc



rtc TYPE LOCK HOSE

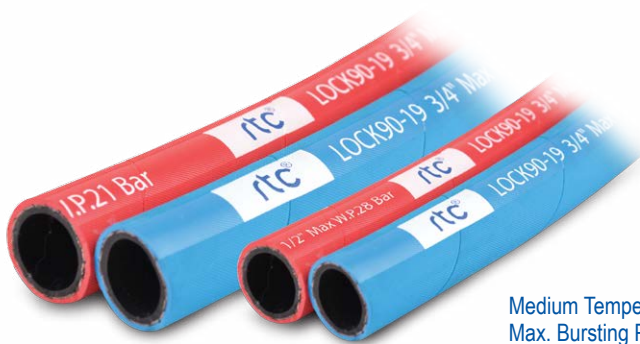

Push To Connect (rtc LOCK) Type Hose

Tube: Hydraulic oil and water resistant special synthetic rubber

Reinforcement: High textile synthetic textile braid

Cover: Oil, abrasion, ozone and water resistant special synthetic rubber

Application: For hydraulic control lines, discharge under low pressure of hydraulic fluids, fuel oil, grease, air and water

Medium Temperature: Air 70°C - Water 90°C
Max. Bursting Pressure: 200 bar
Max. Working Pressure: 28 bar
Colors: Red, Blue, Black
Dimensions: 3/8 - 1/2 - 5/8 - 3/4

Temperature: rtc LOCK 90 -40°C +90°C (-40°F +194°F)
rtc LOCK S-90 -40°C +90°C (-40°F +194°F)
rtc LOCK S-140 -40°C +140°C (-40°F +284°F)



ACCESSORIES

TYPE M103 **rtc**

Flat Faced Non-Spill Multi-Couplings
Flachdichtende Multikupplung in Lecksgefreier Ausführung
Düz Alınlı Damlatmasız Manifold


Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma basıncı
rtc M103.10 200 bar (2900 PSI)

Flow size - Nennweiten - Akış Çapı
rtc M103.10 10 mm

Connections - Anschlüsse - Bağlantı
2 / 4 / 6 / 8

Circuits - Kreislauf - Giriş/Çıkış
1 ↔ 1 2 ↔ 2 3 ↔ 3 4 ↔ 4



HYDRAULIC

rtc TYPE M104



Flat Faced Non-Spill Multi-Couplings
Flachdichtende Multikupplung in Lecksgefreier Ausführung
Düz Alınlı Damlatmasız Manifold

Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma basıncı
rtc M104.08 200 bar (2900 PSI)

Flow size - Nennweiten - Akış Çapı
rtc M104.08 8 mm
rtc M104.10 10 mm

Connections - Anschlüsse - Bağlantı
2 / 4 / 6 / 8

Circuits - Kreislauf - Giriş/Çıkış

HYDRAULIC

TYPE M115 **rtc**

Flat Faced Non-Spill Multi-Couplings
Flachdichtende Multikupplung in Lecksgefreier Ausführung
Düz Alınlı Damlatmasız Manifold


Temperature Range - Temperaturbereich - Sıcaklık Aralığı
-20°C +100°C (-4°F +212°F) Nitril (N)
-10°C +180°C (+14°F +356°F) FPM (V)

Max. Working Pressure - Max. Betriebsdruck - Max. Çalışma basıncı
rtc M115.03 100 bar (1450 PSI)

Flow size - Nennweiten - Akış Çapı
rtc M115.03 3 mm
rtc M115.05 5 mm

Connections - Anschlüsse - Bağlantı
2 / 4 / 6 / 8 / 10 / 12 / 14 / 16

Circuits - Kreislauf - Giriş/Çıkış
1 ↔ 1 2 ↔ 2 3 ↔ 3 4 ↔ 4 5 ↔ 5 6 ↔ 6 7 ↔ 7 8 ↔ 8



HYDRAULIC

rtc TYPE M301 - Mini-Con



Customised Mini-Connector
MiniSondermultikupplungen
Özel Tasarım Mini Manifold

All kinds of connections, such as, **Water**, **Pneumatic**, **Hydraulic** and **Electrical Connectors** can be mounted on the same plate, in order to minimise the mold changing time without any possible mistake.

This is mostly used in robotic industry. Thermocouples, Compressed Air, Cooling, Hydraulic and Electric connections.



The quick mold change system
for thermoplastics.
Stable up to 130°C


Das Schnellwechselsystem für
Thermoplaste.
Temperaturstabil bis 130°C

Technical Specifications - Technische Daten

For Injection and transfer molding
All sizes, both vertically and horizontally.

Für Pressen und Spritzpressen
Alle Größen, vertikal und horizontal.


Max. Temperature / Max. Temperatur	130°C
Magnetic Field / Spez. Magnetkraft	18 kg/cm ²
Effective Magnetic F. / Effektive Magnetkraft	5-12 kg/cm ²
Mag. Penetration Depth / Magn. Eindringtiefe	15-20 mm
Plate Thickness / Plattendicke	47 mm
Fastening / Befestigung	nach Euromap



MAG TEC rtc

ACCESSORIES

rtc TYPE Customised Multi Coupling System

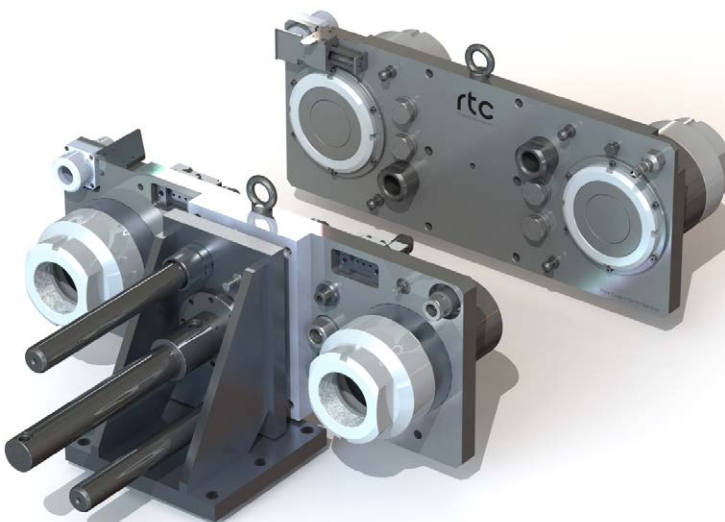


Customised Multi-Couplings
Sondermultikupplungen nach Kundenwunsch
Özel Tasarım Manifold

Customised Multi-Couplings are specially designed according to the customer's needs.

All kinds of connections, such as, **Water**, **Pneumatic**, **Hydraulic** and **Electrical Connectors** can be mounted on the same plate, in order to minimise the mold changing time without any possible mistake.

Our Research & Development team provides the best solution to the end users, according to the specific inquiries.



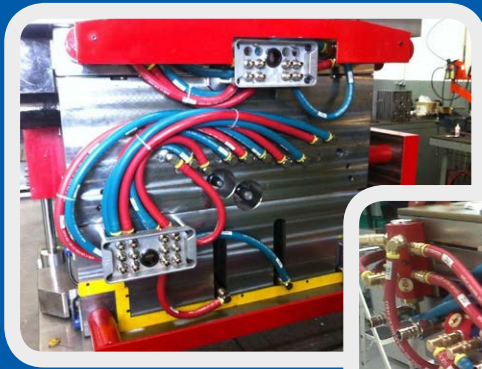

rtc[®]
COUPLING TECHNOLOGY

www.rtc-tec.com



RTC TEC Bağlantı Elemanları A.Ş.

ITOSB, 9. Cadde No. 8 PK34959
Tepeören / Tuzla / İstanbul
TURKEY
Tel: +90 216 593 47 82
Fax: +90 216 593 47 85
info@rtc-tec.com
www.rtc-tec.com



RTC Couplings GmbH

Jahnstrasse 86
73037 Göppingen
GERMANY
Tel: +49 7161 98796-50
Fax: +49 7161 98796-79
mail@rtc-couplings.com
www.rtc-couplings.com



RTC Couplings Lda

Rua Manuel Pereira Godinho
n.241 3700-784
Nogueira do Cravo
PORTUGAL
Tel: +351 918 034018
mail@rtc-couplings.pt
www.rtc-couplings.pt



RTC Couplings North America

60 Meg Drive.
London, On. N6E 3T6
CANADA
Tel: +1 519 204 8334
Fax: +1 519 518 6047
tony@rtc-northamerica.com
www.rtc-northamerica.com